

ND-DOME 900/MS40 120V IA1 VWB




- *No flicker, even when dimming below 5%*
- *Wireless lighting with remote monitoring app*
- *Dynamic spectrum directs desirable behaviors in animals and can be adjusted to improve welfare*
- *Highly efficient LED with lifetime >50,000 hours*
- *Optimal light distribution*

## Introducing a dynamic lighting solution


Improve animal welfare while experiencing optimal results with the NatureDynamics Dome. This customizable LED-based luminaire features an advanced and intuitive light spectrum that is designed to meet the individual needs of every species at all stages of growth.

With this new, revolutionary and future-proof lighting solution, farmers now have maximum zoning flexibility and easy light recipe management through an app-based platform. By utilizing our scientifically proven light recipes (spectrum, intensity and schedule) the ideal lighting to solve daily challenges, improve animal welfare and achieve optimal results is a touch away.

### Dimensions

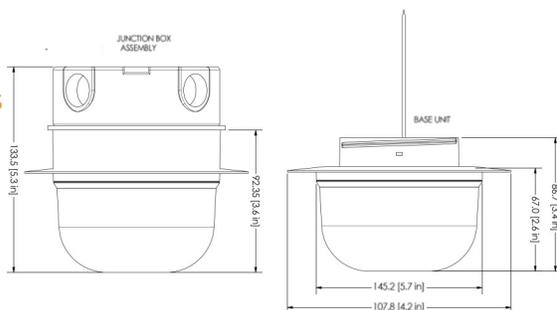

### Beam Spread

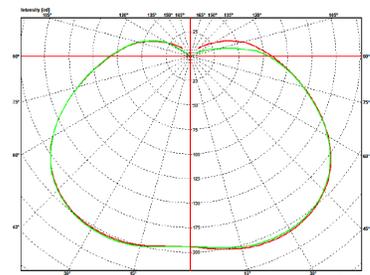

Visit our website for more information: [www.once.lighting](http://www.once.lighting)

# Specifications and Ordering

## ND-DOME 900/MS40 120V IA1 VWB Specs

Nominal power	11W
Luminous flux - human photopic	1200lm
Luminous flux - poultry photopic	-
Initial LED luminaire efficacy	109lm/W
Input voltage	100-125VAC
Input frequency	60 Hz
Driver included	Yes
Surge protection	Overheat and fuses
Inrush current	-
Inrush time	-
Power consumption tolerance	+/- 10%
Power factor	0.9
Beam angle	Wide beam
Driver failure rate at 50k hrs	<10%
Warranty period	5 years
Recyclable	Yes
HS code	85395000
Country of origin	Poland

## Spectral Output and Dimming Specifications

Dimmable	Yes
Dimmable range	100% to 0%
Spectral output	RGB (Dim-to-Red optimized)

## Operating and Mechanical Specifications

Operating temperature	-10°C to 40°C / 14°F to 104°F
Rated Life	>50,000 hours
Lens material	PMMA
Housing material	PC
Diameter	14.9cm
Height	9.4cm
Length	-
Width	-
Mount / Adaptor	ND Dome JB Adaptor
Connection	2 conductor wire lead
Control interface	ZigBee controller PMW
Product weight per piece	0.22 Kg / 0.495 Lbs

## Safety and Certifications

CE Mark	-
RoHS Compliant	Yes
ANSI/UL	Yes
CB	-
Flammability mark	-
ECO energy classification	Exempt
IEC protection class	Class II
IK impact rating	IK03
IP Code	IP66

## Ordering Information

Description	SKU	Order code
ND DOME 900/MS40 120V IA1 VWB	1000000967	929002100648

**Contact us  
or learn more at:**  
[www.once.lighting](http://www.once.lighting)

**ONCE Innovations Inc**  
3955 Annapolis Ave N, Suite 100  
Plymouth, MN 55447  
P +1(763) 297 9163

**ONCE GmbH**  
Vechtaer Marsch 3  
49377 Vechta, Germany  
P +49 (0)4441 8898-10

**Email:** [once.info@signify.com](mailto:once.info@signify.com)



© 2022 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Revised 12/2022 Data subject to change