

- Improves animal welfare
- Moves birds horizontally throughout system
- Makes birds noticeably calmer
- Reduces mortality and piling
- More flexible bird management option
- Helps create uniform spacing of birds



AgriShift® lighting systems “shift” spectrum and intensity, meeting the individual needs of your animals¹.



Dim-to-Red® technology provides natural dawn and dusk simulation, reducing stress on your animals.



A Built For Your Barn® design uses techniques and materials that withstand harsh barn environment for years to come.

Animal-Centric Lighting Systems

The AgriShift® TL3 in-system tube light provides poultry producers with a lighting solution designed to move birds horizontally throughout the system. Made with Dim-to-Red® technology and a Built For Your Barn® design, the AgriShift® TL3 reduces mortality and piling, increases flock performance and provides a more flexible bird management option to naturally move birds around the system.

The AgriShift® TL3 is a useful tool to assist with creating uniform spacing of birds, meeting the needs of today’s modern poultry houses and making birds noticeably less-stressed and calmer.

The Science Behind the Technology

The AgriShift® TL3 has a deep red saturated light output with an added blue and green spectrum, benefiting the vision of your animal. The enhanced red spectrum is the only spectrum which stimulates a bird’s hypothalamic and pineal oscillators, helping maintain circadian rhythms and promoting sexual maturity. It also stimulates the release of two reproduction regulating hormones essential for sexual maturation and daily egg production.



AgriShift® TL3 Specifications

Nominal Power	3.5W (at full intensity)
Luminous Flux	168 lm human photopic 331 lm poultry photopic
Input Voltage	120 VAC / 50/60 Hz
Beam Angle	200°
Light Output Equivalence	Up to 25W incandescent
Spectral Output	Species-specific red enhanced white
Operating Temperature	-20°C to 40°C / -4°F to 104°F
Dimmable Range	100% to 5%, dims-to-red hue
Dimmer Type	Phase Modulation or Amplitude Control**
Environmental Ratings	Suitable for damp locations***, Suitable for indoor corrosive environments per UL50E Salt Spray Test, RoHS Compliant
Safety	Conforms to ANSI/UL STD 1598, Certified to Can/CSA STD. C22.2 NO. 250.0

*Maximum number wired in series: 125 units

**For optimum dimming performance use AgriShift® Controllers

***May not meet electrical codes in all states

Ordering Information

AgriShift® TL3

1-Tube Assembly, Channel A, 48" OAL	SKU TL3-0215-1-120
<i>Black End Caps, includes mounting clips</i>	
1-Tube Assembly, Channel B, 48" OAL	SKU TL3-0216-1-120
<i>Orange End Caps, includes mounting clips</i>	
TL3 Extension Cord, 48" OAL	SKU TL3-0213-004
<i>Male/female connector on either end</i>	

AgriShift® TL3 Accessories


Starter Cable and end cap, 15ft	SKU TL3-EXT-1-180
<i>Female connector on one end</i>	

AgriShift® Controllers

AgriShift® G Controller	SKU ALC-G2S-UNAC-2-10
AgriShift® Master Controller 120V	SKU 30-014-00188-L123
AgriShift® Slave Dimmer 120V	SKU 30-014-00189-L123
AgriShift® Master Controller 240V-50Hz	SKU 30-014-00180-L123
AgriShift® Master Controller 240V-60Hz	SKU 30-014-00180-L123-60Hz

The spectral output charts below show the AgriShift® TL3 at 100% compared to it dimmed at 20%, while demonstrating how a chicken sees the light (dotted line).

TL3 Spectral Output at 100%

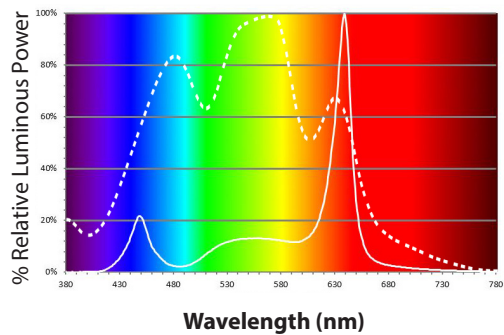

TL3 Spectral Output at 20%

